

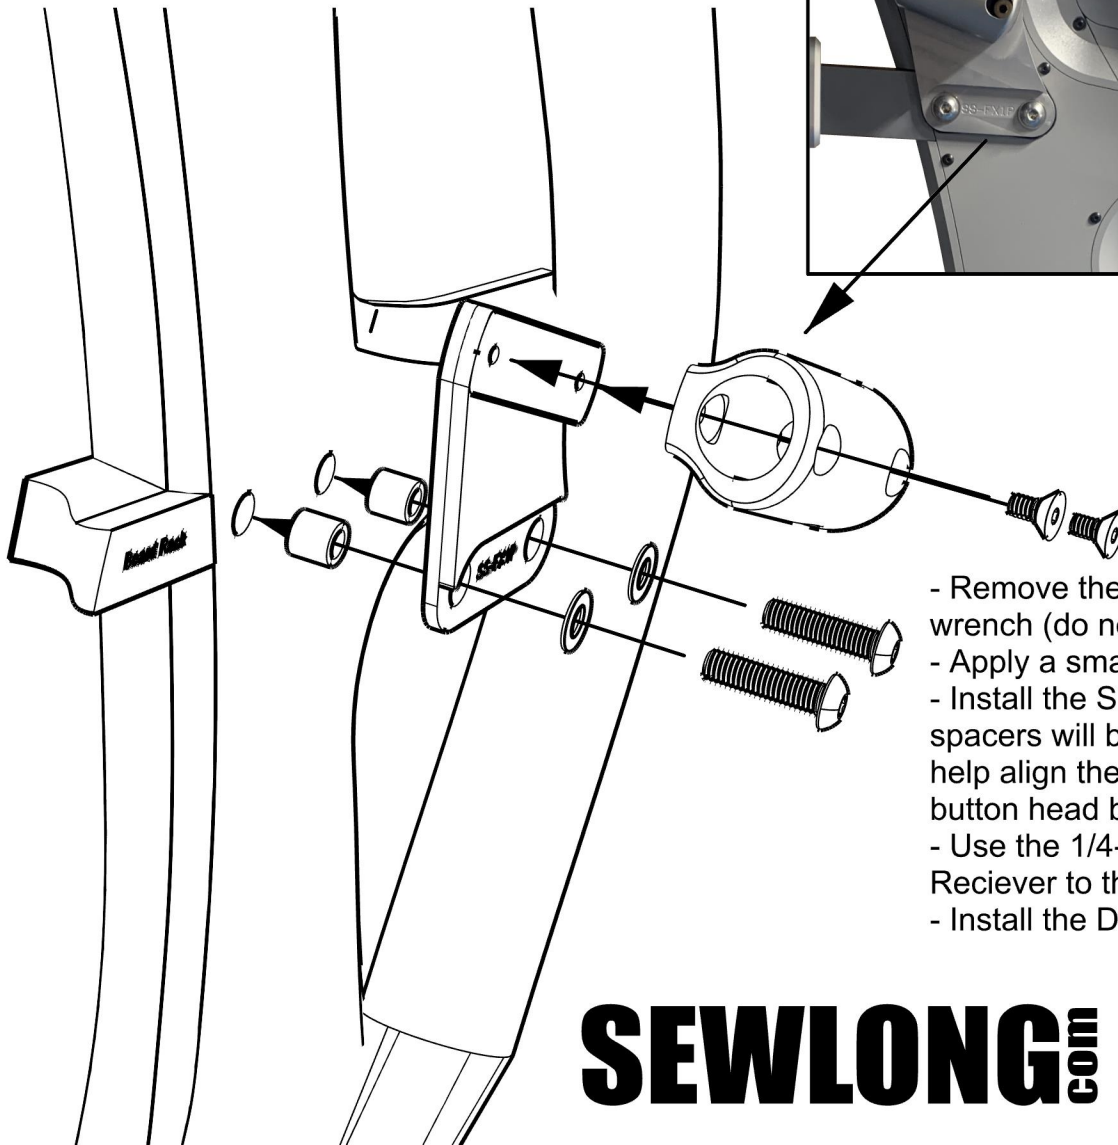


SSK-FX1RM

(Shade Sail Kit - FX1 Board Rack Mount)

Port Side

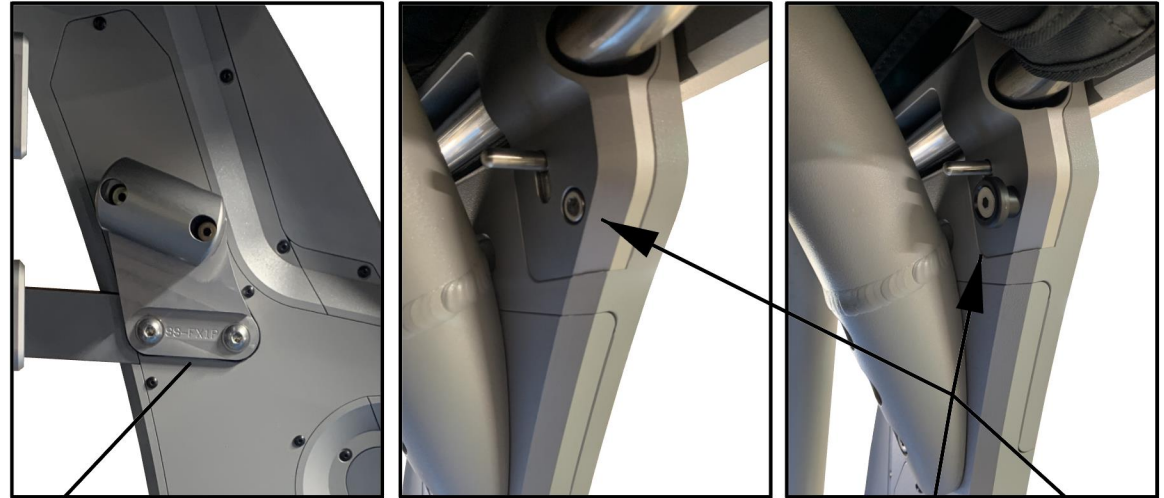

- Remove the bolts for the top board rack using a 5/16 hex wrench (do not remove the board rack).
- Apply a small amount of thread locker to the supplied bolts.
- Install the Shade Sail FX1 Mount plate (P or S). The plastic spacers will be inserted into the tower and stick out enough to help align the plate. Bolt into place with the 3/8-16 x 1-1/2" button head bolts and .406 D washer.
- Use the 1/4-20 c 1/2" flat head bolts to mount the Shade Sail Receiver to the mounting plate.
- Install the D-Ring knob, as shown in the photos above.

SEWLONG^{COM} 3555 s Main st 801-262-4017
SLC, UT 84115 covers@sewlong.com